


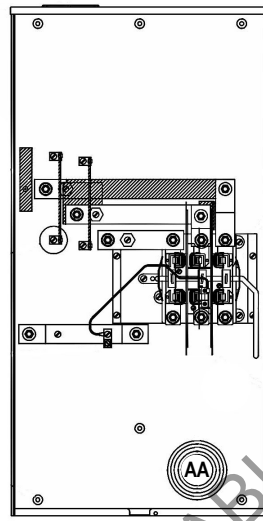


320 Ampere - Lever Bypass Offset Based Meter Sockets



5 & 7 Jaw | HQ Bypass/Jaw Clamping | Ringless Style | 600 VAC



UT-H5330U

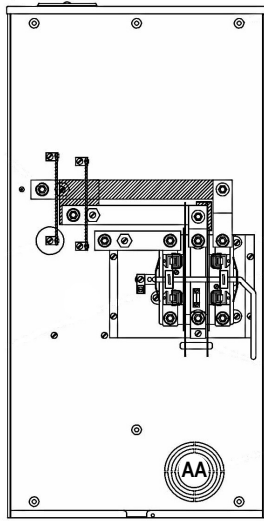

T-H7330T



Catalog Number	Amps	Service	Hub	# Jaws	Wire Size CU-AL		Dimensions		
					Line	Load	H"	W"	D"
T-H5330S	320	OH/UG	4" Hub	5	3/8" Studs	3/8" Studs	39-7/8	20	6-1/2
T-H5330T	320	OH/UG	HO	5	3/8" Studs	3/8" Studs	39-7/8	20	6-1/2
UT-H5330U	320	OH/UG	HO	5	3/8" Studs	3/8" Studs	39-7/8	20	6-1/2
T-H7320A	320	UG	Solid	7	3/8" Studs	3/8" Studs	30	20	6-1/2
T-H7329A	320	UG	Solid	7	(2) #6-350	(2) #6-350	30	20	6-1/2
T-H7330T	320	OH/UG	HO	7	3/8" Studs	3/8" Studs	39-7/8	20	6-1/2
T-H7330U	320	OH/UG	HCP	7	3/8" Studs	3/8" Studs	39-7/8	20	6-1/2
UT-H7336-9Q	320	OH/UG	3" Hub	7	#4-600	(2) #6-350	39-7/8	20	6-1/2
UT-H7336-9U	320	OH/UG	HCP	7	#4-600	(2) #6-350	39-7/8	20	6-1/2
T-H7339U	320	OH/UG	HCP	7	(2) #6-350	(2) #6-350	39-7/8	20	6-1/2

Hub /Top Configuration	Catalog Suffix	Hub /Top Configuration	Catalog Suffix
Solid Top	A	Solid Top	A
For Hub (SM)	B	For Hub (LG)	T
HCP (SM)	C	HCP (LG)	U
1-1/4" (SM)	L	2-1/2"(LG)	V
1-1/2" (SM)	M	3"(LG)	Q
2" (SM)	N	3-1/2"(LG)	R
2-1/2"(SM)	P	4"(LG)	S

- Units rated 320 ampere continuous. Meter Socket short circuit current ratings are greater than 10,000 amperes when used in conjunction with certain types of over current protection. Contact factory for details.
- NEMA 3R Enclosures, UL (Underwriters Laboratories) label available on most units. Add prefix U for UL label.
- For Meter Socket options see replacement parts & accessory pages.

Concentric Knockout	
AA	4, 3-1/2, 3, 2-1/2, 2
UU	1/2
VV	5/16

Eaton UTRS213BE

Catalog number: UTRS213BE

Eaton meter socket, 1-pos resi service, 200 A, Over/under, 3-5/16 inch hub open, #6-350 kcmil, 4-jaw, 1-ph, #6-350 kcmil, Gnd conn (#14-#2 Cu), Triplex, 3-wire, Ringless, 600 Vac



General specifications

Product Name

Eaton meter socket

UPC

786685217758

Product Height

15.11 in

Product Weight

14 lb

Catalog Number

UTRS213BE

Product Length/Depth

4.48 in

Product Width

11.22 in

Warranty

Eaton Selling Policy 25-000, one (1) year from the date of installation of the Product or eighteen (18) months from the date of shipment of the Product, whichever occurs first.

Certifications

UL Listed



Powering Business Worldwide

Phase

Single-phase

Utility approvals

ME : Central Maine Power

MI : DTE Energy (Detroit Edison)

MO : Empire District Electric

OK : Empire District Electric

AR : Entergy

LA : Entergy

MS : Entergy

TX : Entergy

TN : Knoxville Utility Board (KUB)

TX : Oncor

NM : Public Service Company of New Mexico (PNM)

CT : United Illuminating (UI)

SC : South Carolina Electric and Gas (SCE&G)

NM : Texas-New Mexico Power (TNMP)

TX : Texas-New Mexico Power (TNMP)

Number of jaws

Four-jaw

Security

Ringless

Amperage Rating

200A

Hub type

3-5/16 in hub opening

Line

#6-350 kcmil

Load

#6-350 kcmil

Type

Single-position residential service

Feed type

Top/bottom

Number of sockets

1

Number of wires

Three-wire

Brochures

Single Meter Sockets

Catalogs

Eaton's Volume 1—Residential and Light Commercial

Drawings

Dimensional Drawing - METER SOCKET UTRS213(X)E, UGTRS213(X)E
200AMP, 1 ø OH/UG, RINGLESS STYLE

Specifications and datasheets

Eaton Specification Sheet - UTRS213BE

Warranty guides

Selling Policy 25-000 - Distribution and Control Products and Services

METER BASE ACCEPTABLE
SAMPLE ONLY



U4363-X-QG-K3-K2



Catalog Number	U4363-X-QG-K3-K2	Mounting	Surface Mount
Marketing Product Description	4 Terminal Ringless Large Closing Plate Quadplex Ground Lever Bypass Single Connector 4-600kcmil Double Connector 6-350kcmil	Enclosure	G90 Galvanized Steel with Powder Coat Finish
UPC	784572263987	Jaw Quantity	4 Terminal
Length (IN)	4.844	Bypass Type	Lever Bypass
Width (IN)	13	Number of Meter Positions	1 Position
Height (IN)	28.25	Equipment Ground	Quadplex Ground
Brand Name	Milbank	Hub Opening	Large Closing Plate
Type	Ringless Meter Socket	Line Side Wire Range	4 AWG - 600 kcmil or Two 1/0 AWG - 250 kcmil
Application	Meter Socket	Load Side Wire Range	Two 6 AWG - 350 kcmil
Standard	UL Listed; Type 3R	Number Of Receptacles	0
Voltage Rating	600 Volts Alternating Current		
Amperage Rating	320 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	4.844L x 13W x 28.25H		
Number Of Cutouts	0		
Cutout Size	No Main Breaker		
Cable Entry	Overhead or Underground		
Terminal	Single Mechanical		
Insulation	Glass Polyester		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



U7043-XL-TG-KK-ALT



Catalog Number	U7043-XL-TG-KK-ALT
Marketing Product Description	4 Terminal Ringless Small Closing Plate Triplex Ground Horn Bypass Alliant Energy Wide Shell
UPC	784572496316
Length (IN)	4.844
Width (IN)	13
Height (IN)	15.5
Brand Name	Milbank
Type	Ringless Meter Socket
Application	Meter Socket
Standard	UL Listed; Type 3R
Voltage Rating	600 Volts Alternating Current
Amperage Rating	200 Continuous Ampere
Phase	1 Phase
Frequency Rating	60 Hertz
Size	4.844L x 13W x 15.5H
Number Of Cutouts	0
Cutout Size	No Main Breaker
Cable Entry	Overhead or Underground
Terminal	Lay in
Insulation	Glass Polyester
Mounting	Surface Mount

Enclosure	G90 Galvanized Steel with Powder Coat Finish
Jaw Quantity	4 Terminal
Bypass Type	Horn Bypass
Number of Meter Positions	1 Position
Equipment Ground	Triplex Ground
Hub Opening	Small Closing Plate
Line Side Wire Range	6 AWG - 350 kcmil
Load Side Wire Range	6 AWG - 350 kcmil
Number Of Receptacles	0


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Single Position Sockets

100 Amps | 4 & 5 Terminal | Ring Type

9

100 AMPS
SINGLE
POSITION
SOCKETS

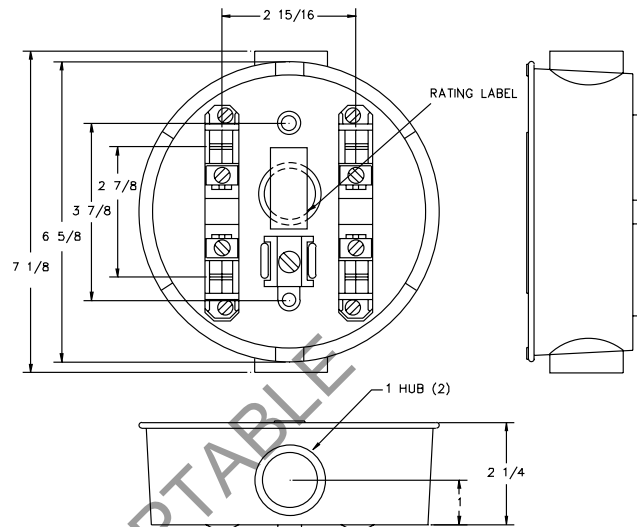

Applications

100 Amps max rated is ideal for use on:

- Temporary Service
- Outdoor Advertising
- Small Customer Service
- Other Low Amps Requirements

100 Amps | 4 & 5 Terminal | Economy Cast Socket | Ring Type | Single Position

Catalog Number	Terminal	Service	Hub	Connectors CU/AL		Quantity Per Package	Knockouts
				Line	Load		
AP2300-03	4	OH/UG	1"	#12-1/0	#12-1/0	12	3/4", 1"
AP2300-04	4	OH/UG	1 1/4"	#12-1/0	#12-1/0	12	3/4", 1"
AP2300-03-5T-AB	5	OH/UG	1"	#12-1/0	#12-1/0	12	3/4", 1"
AP2300-08	5	OH/UG	1"	#12-1/0	#12-1/0	12	3/4", 1"

Notes


- **Ampere Rating:** 80 Amps continuous, 100 Amps Maximum.
- **Fifth & sixth terminal:** Contact factory.
- **Sealing ring:** Supplied with a snap action sealing ring.
- **Hub:** Units supplied with cast in hub on top and bottom. Consult factory for availability of other hub sizes.
- **Bypass:** Also available with auto bypass. Contact factory.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Single Position Sockets

125 Amps | 4 Terminal | 600 VAC

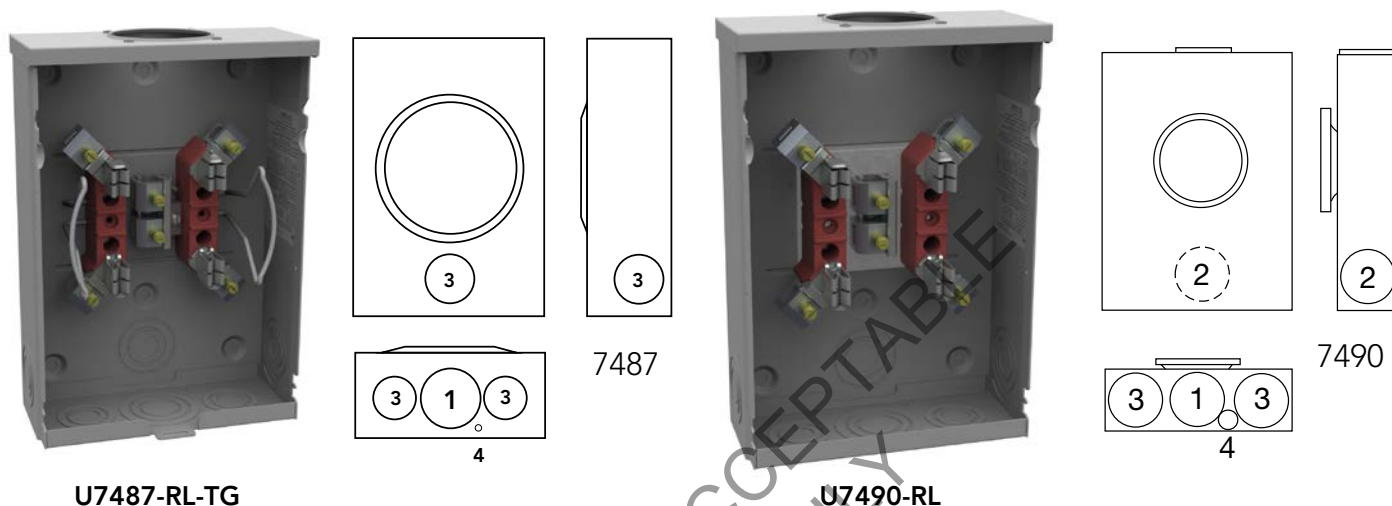

125 Amps | Single Position | 4 Terminal | Ringless

Catalog Number	Service	Hub	Connectors CU/AL	Bypass	Dimensions			Knockouts			
					D"	W"	H"	1	2	3	4
U7487-RL-TG	OH/UG	H.O.	#6-2/0	None	3 ¹⁵ / ₁₆	8	11 ¹ / ₂	2	1 ¹ / ₂	1 ¹ / ₄	1 ¹ / ₄

125 Amps | Single Position | 4 Terminal | Ring Type

Catalog Number	Service	Hub	Connectors CU/AL	Dimensions			Knockouts			
				D"	W"	H"	1	2	3	4
U7490-RL	OH/UG	H.O.	#6-2/0	3 ⁵ / ₁₆	8	11 ¹ / ₂	2	1 ¹ / ₂	1 ¹ / ₄	1 ¹ / ₄

Notes

- **Fifth terminal:** For field mounted fifth terminal on the **U7487** and **U7490** order catalog number **5T8K2** to fit into round opening at the 9 o'clock position.
- **Hubs:** For proper hub selection see the hub suffix chart on the accessory page.
- **Connectors:** Extruded aluminum connectors are tin plated.
- **Sealing rings:** Ring type units supplied with an **MR-2** snap action sealing ring as standard.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Single Position Sockets

200 Amps | 4 Terminal | Ringless

1 1
200 AMPS
SINGLE
POSITION
SOCKETS




U7021-DL-TG


U7040-XL-TG

U7040-RL-TG


U1980-O



7040
7021



1980



4413

200 Amps | 4 Terminal | Single Position | Ringless

Catalog Number	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
			Line	Load		D"	W"	H"	1	2	3	4
U7021-DL-TG	OH	2	#6-350	#6-350	None	4 $\frac{1}{8}$	8	15 $\frac{1}{2}$	2 $\frac{1}{2}$	$\frac{1}{4}$, $\frac{1}{2}$	$\frac{1}{4}$	—
U7021-RL-TG	OH	H.O.	#6-350	#6-350	None	4 $\frac{1}{8}$	8	15 $\frac{1}{2}$	2 $\frac{1}{2}$	$\frac{1}{4}$, $\frac{1}{2}$	$\frac{1}{4}$	—
U7040-RL-TG	OH/UG	H.O.	#6-350	#6-350	None	4 $\frac{1}{8}$	8	14 $\frac{1}{2}$	2 $\frac{1}{2}$	$\frac{1}{4}$, $\frac{1}{2}$	$\frac{1}{4}$	—
U7040-XL-TG	UG	C.P.	#6-350	#6-350	None	4 $\frac{1}{8}$	8	14 $\frac{1}{2}$	2 $\frac{1}{2}$	$\frac{1}{4}$, $\frac{1}{2}$	$\frac{1}{4}$	—
U1980-O**	UG	Blank	#6-350	#6-350	None	4 $\frac{1}{2}$	13	15 $\frac{1}{4}$	2 $\frac{1}{2}$	$\frac{1}{4}$, $\frac{1}{2}$	1 $\frac{1}{2}$	$\frac{1}{4}$, $\frac{1}{2}$
*U4413-O-KK-BLG**	UG	Blank	#6-350	#6-350	None	4 $\frac{1}{2}$	13	15 $\frac{1}{4}$	2 $\frac{1}{2}$	$\frac{1}{4}$, $\frac{1}{2}$	$\frac{1}{4}$	—

Notes

- **Hubs:** For proper hub selection see the hub suffix chart on the accessory page.
- **Fifth terminal:** For field mounted fifth terminal, order catalog number **K5T** to fit into square opening at the 9 o'clock position.
- **Connectors:** Units with -TG suffix include triplex ground connector.
- **Bypass:** Units provided with horn type bypass (suffix -KK).
*Barrel lock with guard provision (suffix -BLG).
**Side wireway.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



1 2


200 AMPS
SINGLE
POSITION
SOCKETS

Single Position Sockets

200 Amps | 4 Terminal | Ring Type




U7017-RL-TG

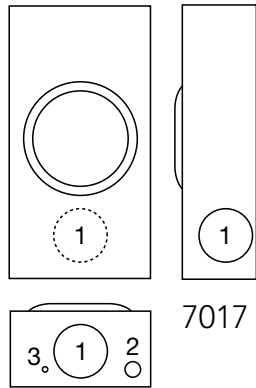


7017



U7018-XL-TG

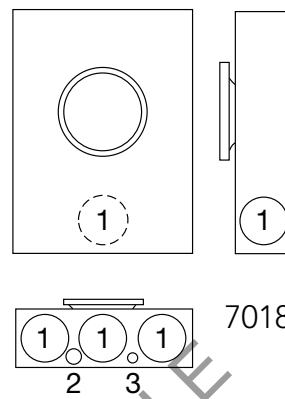

7018

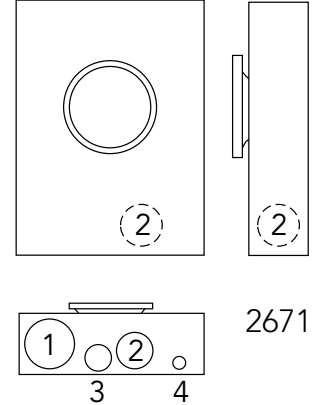

2671

200 Amps | 4 Terminal | Ring Type

Catalog Number	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
			Line	Load		D"	W"	H"	1	2	3	4
U7017-RL-TG	OH	H.O.	#6-350	#6-350	None	4 $\frac{1}{8}$	8	15 $\frac{1}{2}$	2 $\frac{1}{2}$	1 $\frac{1}{4}$, 1 $\frac{1}{2}$	1 $\frac{1}{4}$	—
U7017-DL-TG-LR*	OH	2	#6-350	#6-350	None	4 $\frac{1}{8}$	8	15 $\frac{1}{2}$	2 $\frac{1}{2}$	1 $\frac{1}{4}$, 1 $\frac{1}{2}$	1 $\frac{1}{4}$	—
U7018-XL-TG	OH/UG	C.P.	#6-350	#6-350	None	4 $\frac{1}{8}$	8	15 $\frac{1}{2}$	2 $\frac{1}{2}$	1 $\frac{1}{4}$, 1 $\frac{1}{2}$	1 $\frac{1}{4}$	—
U7018-O-TG	UG	BLANK	#6-350	#6-350	None	4 $\frac{1}{8}$	8	15 $\frac{1}{2}$	2 $\frac{1}{2}$	1 $\frac{1}{4}$, 1 $\frac{1}{2}$	1 $\frac{1}{4}$	—
U2671-O	UG	BLANK	#6-350	#6-350	None	4 $\frac{1}{2}$	13	15 $\frac{1}{4}$	3	2 $\frac{1}{2}$	1 $\frac{1}{2}$	1 $\frac{1}{2}$

Notes

- **Hubs:** For proper hub selection see the hub suffix chart below or accessory section.
- **Fifth terminal:** For field mounted fifth terminal order catalog number **K5T**.
- **Connectors:** Extruded aluminum internal hex lay-in type connectors are tin plated. Units are supplied with duplex neutral.
- **Triplex ground (-TG):** Factory installed.
- **Sealing rings:** Ring type units are supplied with **MR-2**, snap action, sealing rings as standard.
- * **Flush mount:** Above products are available in flush mount. Contact factory for pricing and availability.

INTERCHANGEABLE UNIT HUBS

Size	Milbank Cat. No.	Suffix
1" (25.4mm)	A7514	-WL
1 $\frac{1}{4}$ " (31.75mm)	A7515	-YL
1 $\frac{1}{2}$ " (38.1mm)	A7516	-ZL
2" (50.8mm)	A7517	-DL
2 $\frac{1}{2}$ " (63.5mm)	A7518	-EL



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.


Single Position Lever Bypass

200 Amps | 7 Terminal | Lever Bypass | Ringless | 600 VAC

13
200 AMPS
SINGLE
POSITION
LEVER BYPASS



U9701-RRL-BL

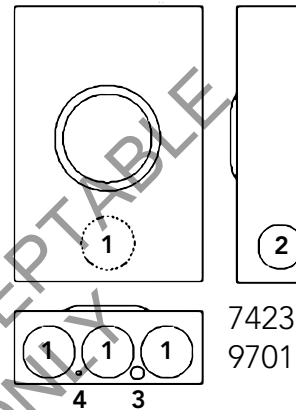

7423
9701

200 Amps | Single Position | Non Jaw Clamping | Lever Bypass | Ringless | 3Ø4W

Catalog Number	Service	Hub	Connectors CU/AL	Bypass	Dimensions			Knockouts			
					D"	W"	H"	1	2	3	4
U7423-RXL	OH/UG	C.P.	#6-350	Lever	4½	13	19	3	2½	¼, ½	¼

200 Amps | Single Position | Jaw Clamping | Lever Bypass | Ringless | 3Ø4W

Catalog Number	Service	Hub	Connectors CU/AL	Bypass	Dimensions			Knockouts			
					D"	W"	H"	1	2	3	4
U9701-RRL-BL	OH/UG	H.O.	#6-350	Lever	4⅞	13	19	3	2½	¼, ½	¼

Notes




- **Hubs:** For proper hub selection see the hub suffix chart on the accessory page.
- **Connectors:** Extruded aluminum connectors are tin plated.
- **Bypass:** The lever on the **U9701** unit supplies clamping action on meter spades and also operates bypass device.
Lever bypass is fully rated at 200 amps.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Single Position Lever Bypass

320 Amps | 4 Terminal | Ringless

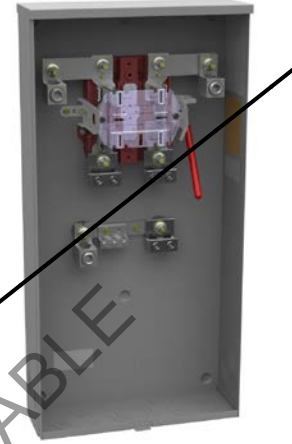

U1797-O-K3L-K2L-BL

U1129-O-K3L-K2L

320 Amps | 4 Terminal | Ringless | 600 VAC

Catalog Number	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts		
			Line	Load		D"	W"	H"	1	2	3
U4433-X-BL	OH/UG	C.P.	#4-600 or (2) 1/0-250	TWIN #6-350	Lever	4 ⁷ / ₈	15	31 ¹ / ₂	3	1 ¹ / ₂ , 1 ¹ / ₄	1 ¹ / ₄
U1129-O-K3L-K2L	UG	Blank	#4-600 or (2) 1/0-250	TWIN #6-350	Lever	4 ⁷ / ₈	15	30	3	1 ¹ / ₂ , 1 ¹ / ₄	1 ¹ / ₄
U1797-O-K3L-K2L-BL	UG	Blank	#4-600 or (2) 1/0-250	TWIN #6-350	Lever	4 ⁷ / ₈	15	30	3	1 ¹ / ₂ , 1 ¹ / ₄	1 ¹ / ₄

Notes

- **Hubs:** For proper hub selection, see hub suffix chart in accessories page.
- **Bypass:** Lever supplies clamping action and also operates bypass device.
- **Connector kits:** Extruded aluminum connectors are tin plated. Order two connector kits to cover both line and load. See accessories page.
- **Fifth terminal:** For field mounted fifth terminal, order as extra **K3865**.
- **Lever bypass:** Lever bypass supplies clamping action on the meter spades and also operates the bypass device.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.


Single Position Lever Bypass

320 Amps | 7 Terminal | Side Wireway | Ringless

15
320 AMPS
SINGLE
POSITION
SOCKETS



U2594-X

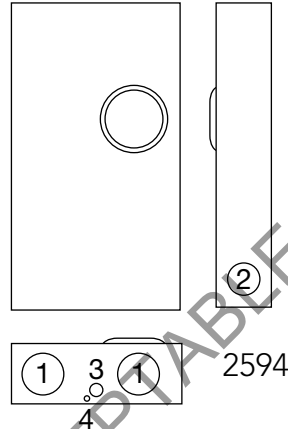

320 Amps | 7 Terminal | Side Wireway | Ringless

Catalog Number	Service	Hub	Connectors CU/AL	Bypass	Dimensions			Knockouts			
					D"	W"	H"	1	2	3	4
U2594-X	UG	C.P.	3/8" -16 Studs	Lever	6½	19	34½	4	3	1	¼

Notes

- **Hubs:** For proper hub selection see the hub suffix chart on the accessory page.
- **Connectors:** Order two kits to cover both line and load on sockets not supplied with line connectors. **NOTE:** For single lug connector kits for the **U2594** unit, order as extra **K3082** (350 kcmil) or **K3441** (600 kcmil). For twin lug connectors order as extra: **K3442** (350 kcmil). Separate kits are required for both line and load.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.




Meter Main with Load Center

100 & 200 Amps | 4 Terminal | Ringless | 120/240 VAC

19
100 & 200 AMPS
SINGLE
POSITION
SOCKETS



U5168-XTL-200

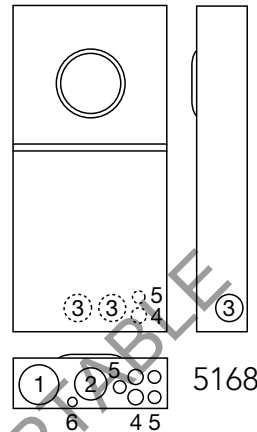

100 & 200 Amps | 4 Terminal | Meter Main | 22K AIC | 103W | Ringless | OH/UG

Catalog Number	Circuits	Hub	Connectors CU/AL Line	Bypass	Dimensions			Knockouts					
					D"	W"	H"	1	2	3	4	5	6
U5168-XTL-100	10	C.P.	#6-350	None	4½	14⅞	32	3	2½	2	1	½, ¾	½, ¼
U5168-XTL-100-KK	10	C.P.	#6-350	None	4½	14⅞	32	3	2½	2	1	½, ¾	½, ¼
U5168-XTL-200	8	C.P.	#6-350	None	4½	14⅞	32	3	2½	2	1	½, ¾	½, ¼
U5168-XTL-200-KK	8	C.P.	#6-350	None	4½	14⅞	32	3	2½	2	1	½, ¾	½, ¼

Notes

- **Hubs:** Supplied with (2) closing plates packed inside. Order hubs as a separate item. See accessory page for hub options.
- **Fifth terminal:** Order **K5T** and field install for 208Y/120 network systems. Installs in the 9 o'clock position only.
- **Interlock kit:** For generator auxiliary circuit breaker interlock, order **K5815** for large **QN** with small frame **Q**; order **K5820** for large frame **QN** with large frame **QN**.
- Ring type also available. Consult factory.
- **Replacement breaker:** -100 is **Q2100H** and -200 is **QN2200RH**.
- **Sub-feed Lugs:** #6-350 kcmil sub-feed lugs provided.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

